

COVERAGE CHARTS

RAINBOW TILE MATE (RTM)


RTM Tile Grout Coverage in sq.ft/ kg										
Tile Dimension (mm)			Joint/ Grouting Width							
Length	Width	Thickness	2	3	4	5	6	8	10	12
300	200	6	77.7	51.8	38.9	31.1	25.9	19.4	15.5	13.0
300	300	6	97.1	64.8	48.6	38.9	32.4	24.3	19.4	16.2
450	300	6	116.6	77.7	58.3	46.6	38.9	29.1	23.3	19.4
600	300	6	129.5	86.3	64.8	51.8	43.2	32.4	25.9	21.6
600	600	8	145.7	97.1	72.9	58.3	48.6	36.4	29.1	24.3
800	800	8	194.3	129.5	97.1	77.7	64.8	48.6	38.9	32.4
1000	1000	10	194.3	129.5	97.1	77.7	64.8	48.6	38.9	32.4
1200	600	10	155.4	103.6	77.7	62.2	51.8	38.9	31.1	25.9
1200	800	10	186.5	124.3	93.3	74.6	62.2	46.6	37.3	31.1
1200	1200	12	194.3	129.5	97.1	77.7	64.8	48.6	38.9	32.4
1600	800	12	172.7	115.1	86.3	69.1	57.6	43.2	34.5	28.8
1800	1200	12	233.1	155.4	116.6	93.3	77.7	58.3	46.6	38.9
25	25	6	8.1	5.4	4.0	3.2	2.7	2.0	1.6	1.3
25	50	6	10.8	7.2	5.4	4.3	3.6	2.7	2.2	1.8
50	50	6	16.2	10.8	8.1	6.5	5.4	4.0	3.2	2.7
100	100	6	32.4	21.6	16.2	13.0	10.8	8.1	6.5	5.4
100	100	10	19.4	13.0	9.7	7.8	6.5	4.9	3.9	3.2

Note :
 (1) This is theoretical coverage. (2) For Sq. Mtr./ kg coverage, divide mentioned coverage by 10.764.

ROFF RAINBOW TILE MATE

SNOW WHITE	
LILY WHITE	
NEW IVORY	
NEW CREAMY WHITE	
BEIGE	
NATURAL	
KHAKI	
PASTEL GREY	
SLATE GREY	
STEEL GREY	
PASTEL BROWN	
COFFEE BROWN	
TERRACOTTA	
ALPINE BLUE	
JET BLACK	
JAISALMER	
MEADOW GREEN	
PEARLY PINK	

Care has been taken to reproduce the shades as closely as possible. Workmanship, site conditions & the amount of water used to the specified mix may produce slight variations in the shades.

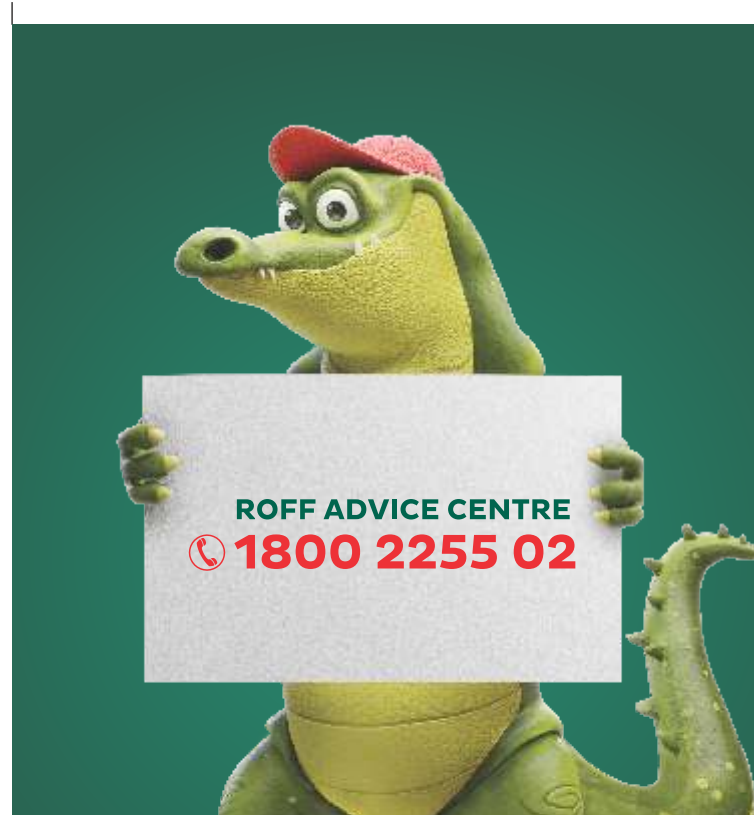

ROFF ADVICE CENTRE
 **1800 2255 02**



Pidilite Industries Ltd.

Construction Chemicals Division, Ramakrishna Mandir Road,
 PO Box No. 17411, Andheri East, Mumbai 400 059.
 TEL (022) 2835 7000 | FAX (022) 2835 7008

www.roff.in | info@roff.in



Follow us on

DISCLAIMER

The product information & application details given by the company & its agents has been provided in good faith & meant to serve only as a general guideline during usage. Users are advised to carry out tests & take trials to ensure on the suitability of products meeting their requirement prior to full scale usage of our products. Since the correct identification of the problem, quality of other materials used and on-site workmanship are factors beyond our control, there are no expressed or implied guarantee / warranty as to the result obtained. The company does not assume any liability or any consequential damage for unsatisfactory results, arising from use of our products.

22CC0565-RF-RTM&EPXYSHDCRD-ENG-FEB

Roff
 TILE & STONE FIXING EXPERT



**ENTER THE
 WORLD OF
 COLOURS**



**SHADE
 CARD**

**RAINBOW |
 TILE MATE
 EPOXY**

**RAINBOW |
 TILE MATE**

ROFF RAINBOW TILE MATE

Roff Rainbow Tile Mate is water resistant cementitious tile joint filler for all kinds of tiles. It effectively fills the gaps and levels itself to give hard wearing, non-dusting, tile joints.



AREAS OF APPLICATION

For filling tile joints in bathrooms, kitchens, internal & external floor & wall tiles. Joins upto 5 mm width tiles.

FEATURES

- High compressive, tensile & flexural strength
- Water resistant property
- Easy to use and clean
- Available in 18 exciting shades

BENEFITS



Easy to clean



Durable



Water resistant tile joints


HOW TO USE




Add 3 to 3.5 parts of Roff Rainbow Tile Mate to one part of water by volume.



Mix to a smooth consistency.



Fill the tile joints by spreading filler paste with rubber trowel such that the entire area of joint gaps are filled.



Remove surplus Roff Rainbow Tile Mate with a damp sponge. Allow 24 hours to dry.